




Type 60 and 65

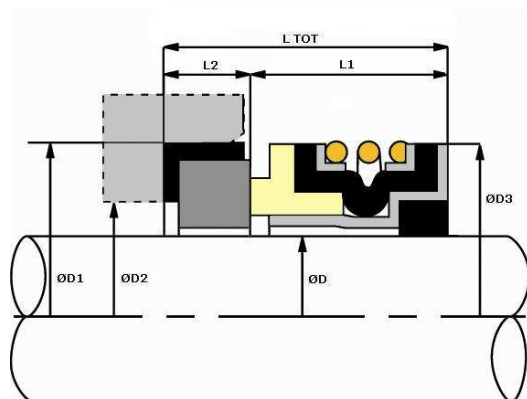

VULCAN STANDARD SIZES

Imperial Size D	Size Code	D1	D2	D3	L1	L2	L TOT
3/8"	0095.60	22.23	14.30	23.80	16.02	6.20	22.22
3/8"	0095.65	25.40	14.30	26.97	16.66	7.92	24.58
1/2"	0127.60	25.40	17.45	26.97	16.66	6.20	22.86
1/2"	0127.65	25.40	17.45	26.97	16.66	7.92	24.58
5/8"	0158.60	31.75	20.63	30.94	18.71	10.28	28.99
5/8"	0158.65	31.75	20.63	30.97	18.24	10.31	28.55
5/8"	0158.65A	30.15	19.38	30.97	18.24	8.71	26.95
5/8"	0158.65B	31.75	20.63	30.97	18.24	9.52	27.76
5/8"	0158.65D	30.15	19.38	30.97	18.24	7.20	25.44
5/8"	0158.L65	31.75	20.63	30.97	19.84	10.31	30.15
5/8"	0158.M65	31.75	20.63	30.97	20.63	10.31	30.94
3/4"	0191.60	34.93	23.80	34.11	18.71	10.28	28.99
3/4"	0191.65	34.93	23.80	34.11	18.24	10.31	28.55
3/4"	0191.65B	34.93	23.80	34.11	18.24	9.52	27.76
3/4"	0191.L65	34.93	23.80	34.11	20.63	6.35	26.98
3/4"	0191.M65	34.93	23.80	34.11	20.63	10.31	30.94
3/4"	0191.M65D	36.50	25.40	34.11	20.63	10.31	30.94
1.0"	0254.60	41.28	30.15	42.85	20.63	11.10	31.73
1.0"	0254.65	41.28	30.15	42.85	20.63	11.10	31.73

Sleeve mounted, short working length, rubber bellows seal with shaft drive ring and boot mounted seat, to suit standard UK and USA housing sizes.

Volume produced and highly suitable for low pressure light duty applications on small shaft centrifugal pumps.

STANDARD FACE MATERIALS
Rotary Face: Carbon.

Seat Ring: Ceramic, Silicon Carbide.

OTHER FACE MATERIALS TO ORDER

Maximum Operating Limits

Pressure 120psi Speed 10m/s

Temperature -40 to +200°C

Limits are dependant upon shaft size, shaft speed, temperature, and media to be sealed.